



Fall Protection



Support at every level.

3M™ DBI-SALA® ExoFit™ Safety Harnesses


XE50 | XE100 | XE200

3M™ DBI-SALA® ExoFit™ Safety Harnesses

Keep your workforce comfortable in uncomfortable places.

Engineered for optimal fit, function and efficiency.

When you work at heights, safety is crucial. That's why 3M™ DBI-SALA® ExoFit™ XE50, XE100 and XE200 fall arrest safety harnesses help your workers reach new heights of productivity and performance whilst keeping them safe and comfortable on every level. With solutions rooted in science, 3M™ DBI-SALA® ExoFit™ harnesses redefine what you should expect from a safety harness.

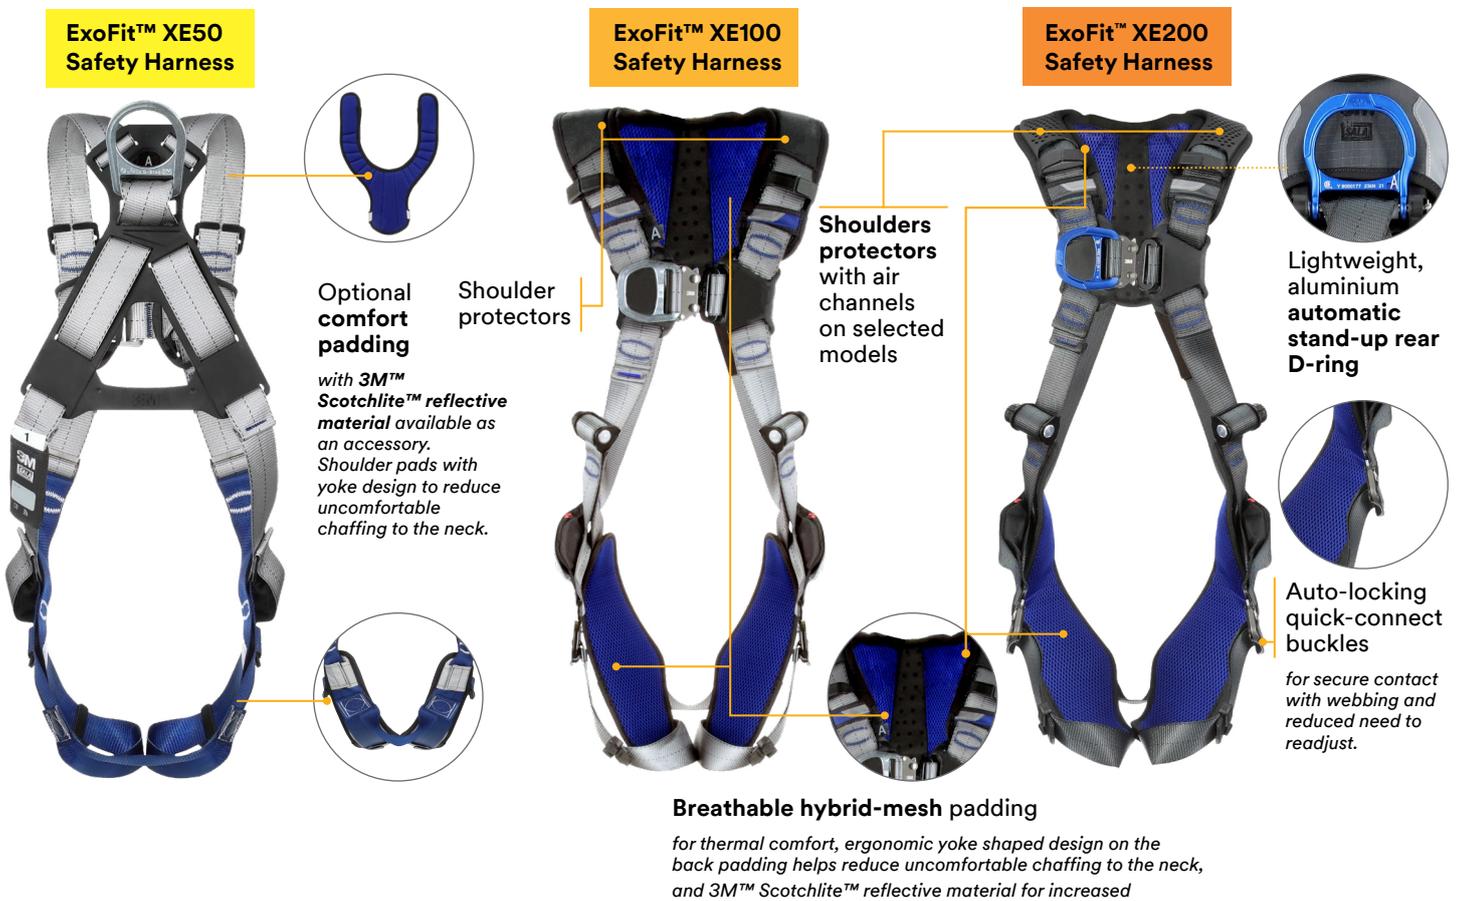

All models are available with and without belt.


All 3M™ DBI-SALA® ExoFit™ XE50, XE100 and XE200 harnesses come equipped with standard DBI-SALA® features:

- Front cross chest buckle with centred D-ring.
- Patented revolving torso adjuster: for quick, safe and comfortable fit.
- Integrated personal Self-Retracting Lifeline (pSRL) tunnel: quick and easy way to connect and disconnect personal SRLs.
- Built-in low-profile suspension trauma relief straps.
- 3M™ Connected Safety RFID tag for simplified inventory, inspection and record management.
- Re-settable & re-positionable lanyard keepers: fast and easy parking of snap hooks and carabiners.
- EN & UKCA Certified

Designed with high-quality components Specially developed for enhanced safety and fit whilst working at heights.

Built with durable 26kN polyester webbing and alloy steel hardware, 3M™ DBI-SALA® ExoFit™ XE50 Safety Harness was created to endure the daily conditions of your work site. The back D-ring plate design with Personal Self-retracting Lifeline (pSRL) tunnel allows quick and easy connection of personal SRLs. Revolving torso-adjustment buckles and quick-connect* buckles will help get your team a quick, safe and comfortable harness fit. This harness is compatible with optional accessories for back/shoulder padding, leg padding and with a variety of 3M Fall Protection for Tools accessories. All models are equipped with low-profile suspension trauma relief straps.

*Selected XE50 models are available with quick-connect pass through buckles.

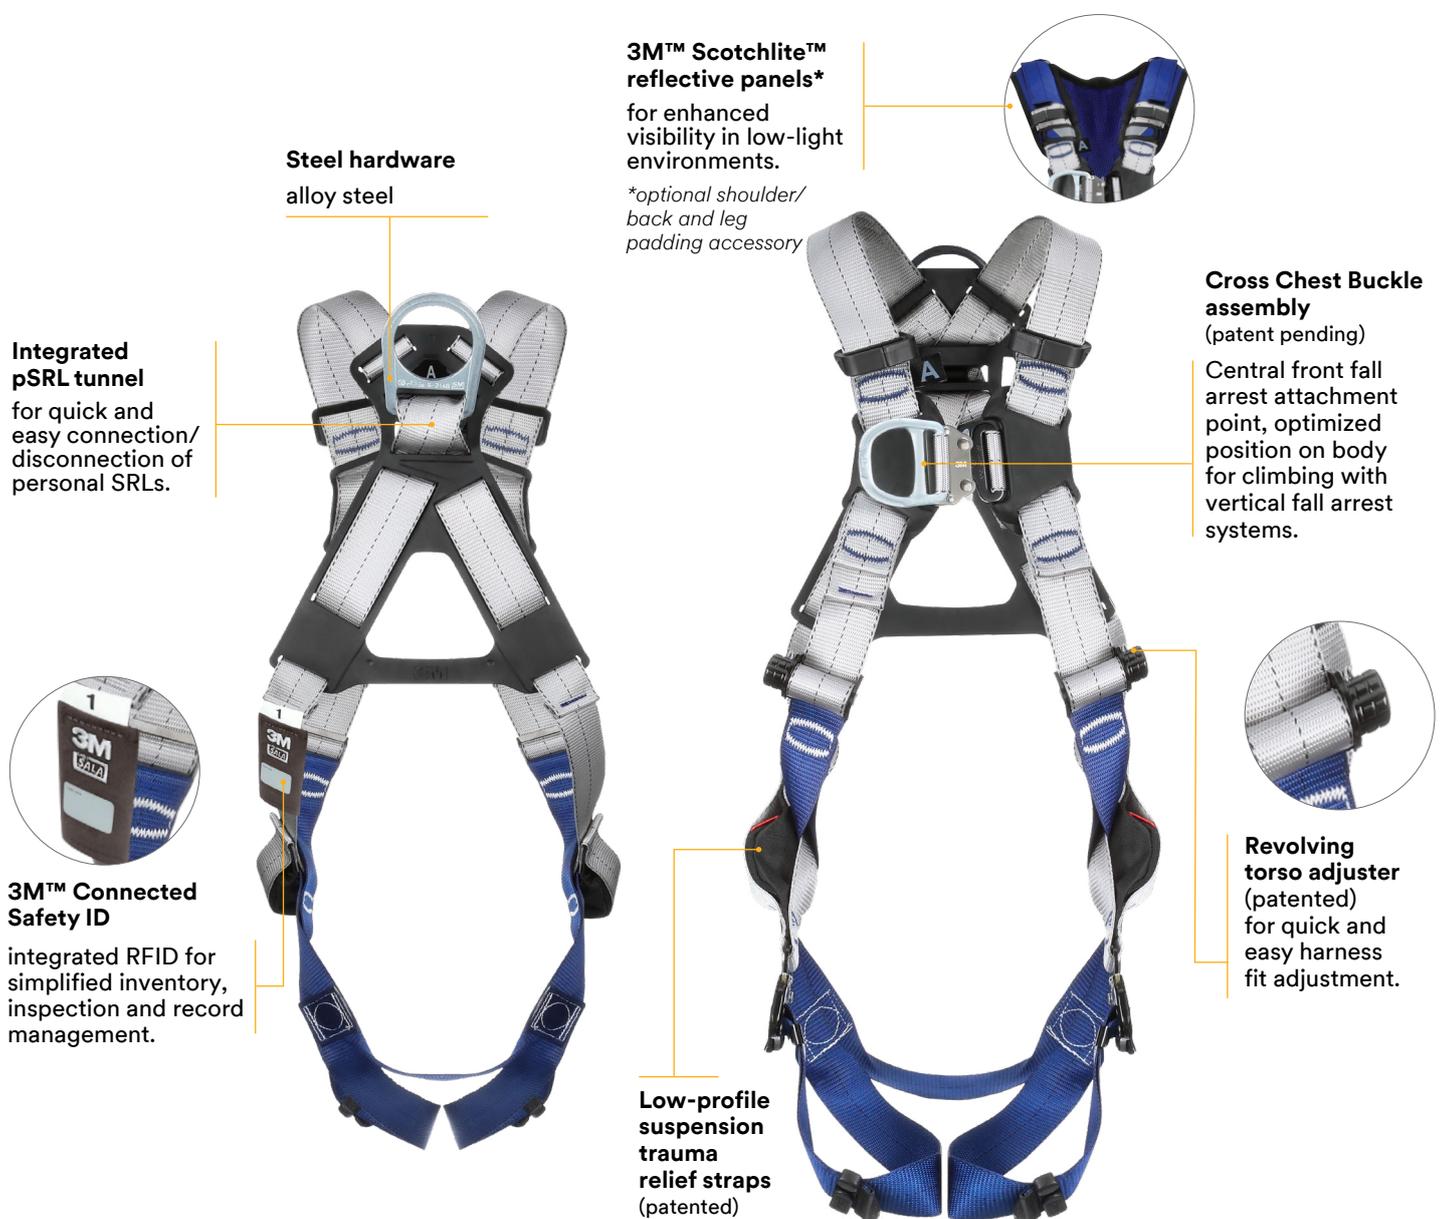

Belted models also available.

Designed with high-quality components

Created for enhanced harness safety, fit and the comfort of your team whilst working at heights.

Built with durable 26kN polyester webbing and alloy steel hardware, the 3M™ DBI-SALA® ExoFit™ XE100 Safety Harness features nylon/polyester hybrid comfort padding with added air channels for comfort alongside reflective 3M™ Scotchlite™ panels. The back D-ring plate design with pSRL tunnel allows quick and easy connection of Personal Self-Retracting Lifelines (pSRLs). XE100 harness features revolving torso-adjustment and quick-connect buckles for a quick, safe and comfortable harness fit. This harness is compatible with variety of 3M Fall Protection for Tools accessories. All models are equipped with low-profile suspension trauma relief straps.

Steel hardware
alloy steel

Integrated pSRL tunnel
for quick and easy connection/disconnection of personal SRLs.

3M™ Connected Safety ID
integrated RFID for simplified inventory, inspection and record management.

3M™ Scotchlite™ reflective panels
for enhanced visibility in low-light environments.

Cross Chest Buckle assembly
(patent pending)
Central front fall arrest attachment point, optimized position on body for climbing with vertical fall arrest systems.

Revolving torso adjuster
(patented)
for quick and easy harness fit adjustment.

Low-profile suspension trauma relief straps
(patented)

Hybrid comfort padding with breathable mesh under-side
for enhanced thermal comfort and ergonomics.

3M™ DBI-SALA® ExoFit™ XE200 Safety Harness

For those who refuse to compromise.

The XE200 comfort harness is built with durable 26kN polyester webbing, lightweight aluminium hardware, hybrid comfort padding with breathable mesh under-side, and reflective 3M™ Scotchlite™ panels. Equipped with modern technology in the dorsal D-ring area for efficient connections and a secure harness fit for your workers, the XE200 also features revolving torso adjustment alongside auto-locking quick-connect buckles to optimize the fit. The 3M™ DBI-SALA® ExoFit™ XE200 Safety Harness is compatible with a range of 3M fall protection accessories for tools. All models are equipped with low-profile suspension trauma relief straps.



Belted models also available.

3M™ DBI-SALA® ExoFit™ Safety Harnesses

Feature Matrix



ExoFit™ XE50
Safety Harness



ExoFit™ XE100
Safety Harness



ExoFit™ XE200
Safety Harness

Feature	XE50	XE100	XE200
Front Cross Chest Buckle with Centred D-ring	✓	✓	✓
Integrated pSRL Tunnel	✓	✓	✓
Revolving Torso Adjusters	✓	✓	✓
Comfort Padding (Back, Shoulders & Legs)	Optional (available as an accessory)	Custom-designed padding with air channels and reflective 3M™ Scotchlite™ panels (back/shoulders)	Lightweight, breathable padding with air channels and reflective 3M™ Scotchlite™ panels (back/shoulders & legs)
Suspension Trauma Relief Straps	✓	✓	✓
Rear D-Ring	Steel D-ring	Steel D-ring	Aluminium Automatic stand-up D-ring
Re-Settable & Re-Positionable Lanyard Keepers	✓	✓	✓
RFID	✓	✓	✓
Buckles	Pass through or Quick Connect	Quick Connect	Auto-locking Quick Connect (on belt and legs)
Available with Work Positioning Belt	✓	✓	✓
Available with Rescue Loops	✓		✓
Packaging	Re-sealable plastic bag	Re-sealable plastic bag	3M™ DBI-SALA® Transport & Storage Bag

ExoFit™ Safety Harnesses available in a variety of styles:

- ▶ General Industry
- ▶ Retrieval – Climbing
- ▶ Climbing – Wind Energy
- ▶ Climbing – Construction – Positioning
- ▶ Retrieval – Climbing – Positioning
- ▶ Climbing – Positioning – Wind Energy

3M™ DBI-SALA® ExoFit™ Safety Harnesses

Learn more about 3M™ DBI-SALA® ExoFit™ Safety Harnesses and find the one that best fits your industry and application.



3M™ DBI-SALA® ExoFit™ XE50 Safety Harness

- ▶ Pass-through buckles
- ▶ Steel front centred and rear fall arrest D-rings
- ▶ Optional comfort padding

Part code	Size	Weight (kg)
1112702	1	1.65
1112703	2	1.70
1112704	3	1.75

CE UK
CA
EN361



3M™ DBI-SALA® ExoFit™ XE50 Positioning Safety Harness

- ▶ Pass-through buckles
- ▶ Steel front centred and rear fall arrest D-rings
- ▶ Steel work positioning D-rings
- ▶ Optional comfort padding

Part code	Size	Weight (kg)
1112705	1	2.20
1112706	2	2.25
1112707	3	2.40

CE UK
CA
EN361
EN358



3M™ DBI-SALA® ExoFit™ XE50 Rescue Safety Harness

- ▶ Pass-through buckles
- ▶ Steel front centred and rear fall arrest D-rings
- ▶ Optional comfort padding
- ▶ Textile rescue loops

Part code	Size	Weight (kg)
1112708	1	1.70
1112709	2	1.75
1112710	3	1.80

CE UK
CA
EN361
EN1497



3M™ DBI-SALA® ExoFit™ XE50 Safety Harness

- ▶ Quick-connect buckles
- ▶ Steel front centred and rear fall arrest D-rings
- ▶ Optional comfort padding

Part code	Size	Weight (kg)
1112711	1	1.65
1112712	2	1.70
1112713	3	1.75

CE UK
CA
EN361



3M™ DBI-SALA® ExoFit™ XE50 Positioning Safety Harness

- ▶ Quick-connect buckles
- ▶ Steel front centred and rear fall arrest D-rings
- ▶ Steel work positioning D-rings
- ▶ Optional comfort padding

Part code	Size	Weight (kg)
1112714	1	2.46
1112715	2	2.53
1112716	3	2.60

CE UK
CA
EN361
EN358



3M™ DBI-SALA® ExoFit™ XE50 Rescue Safety Harness

- ▶ Quick-connect buckles
- ▶ Steel front centred and rear fall arrest D-rings
- ▶ Optional comfort padding
- ▶ Textile rescue loops

Part code	Size	Weight (kg)
1112717	1	1.70
1112718	2	1.75
1112719	3	1.80

CE UK
CA
EN361
EN1497



3M™ DBI-SALA® ExoFit™ XE100 Comfort Safety Harness

- ▶ Quick connect buckles
- ▶ Steel front centred and rear fall arrest D-rings
- ▶ Shoulders and back comfort padding with 3M™ Scotchlite™ reflective material
- ▶ Leg comfort padding

Part code	Size	Weight (kg)
1112720	1	1.90
1112721	2	1.95
1112722	3	2.00

CE UK
CA
EN361



3M™ DBI-SALA® ExoFit™ XE100 Comfort Positioning Safety Harness

- ▶ Quick connect buckles
- ▶ Steel front centred and rear fall arrest D-rings
- ▶ Steel work-positioning D-rings
- ▶ Shoulders and back comfort padding with 3M™ Scotchlite™ reflective material
- ▶ Leg comfort padding

Part code	Size	Weight (kg)
1112723	1	2.65
1112724	2	2.70
1112725	3	2.75

CE UK
CA
EN361
EN358



3M™ DBI-SALA® ExoFit™ XE200 Comfort Safety Harness

- ▶ Quick connect buckle - chest
- ▶ Auto-locking quick connect buckles - legs
- ▶ Aluminium automatic stand-up rear fall arrest D-ring
- ▶ Shoulders and back comfort padding with 3M™ Scotchlite™ reflective material
- ▶ Leg comfort padding with 3M™ Scotchlite™ reflective material
- ▶ Heavy-duty wear protection on shoulders

Part code	Size	Weight (kg)
1112726	1	2.23
1112727	2	2.25
1112728	3	2.30



3M™ DBI-SALA® ExoFit™ XE200 Comfort Positioning Safety Harness

- ▶ Quick connect buckle - chest
- ▶ Auto-locking quick connect buckles - legs and waist
- ▶ Aluminium front centred fall arrest D-ring
- ▶ Aluminium automatic stand-up rear fall arrest D-ring
- ▶ Aluminium work positioning D-rings
- ▶ Shoulders and back comfort padding with 3M™ Scotchlite™ reflective material
- ▶ Leg comfort padding with 3M™ Scotchlite™ reflective material
- ▶ Heavy-duty wear protection on shoulders

Part code	Size	Weight (kg)
1112729	1	2.85
1112730	2	2.90
1112731	3	2.95



3M™ DBI-SALA® ExoFit™ XE200 Comfort Rescue Safety Harness

- ▶ Quick connect buckle - chest
- ▶ Auto-locking quick connect buckles - legs
- ▶ Aluminium front centred fall arrest D-ring
- ▶ Aluminium automatic stand-up rear fall arrest D-ring
- ▶ Shoulders and back comfort padding with 3M™ Scotchlite™ reflective material
- ▶ Leg comfort padding with 3M™ Scotchlite™ reflective material
- ▶ Textile rescue loops

Part code	Size	Weight (kg)
1112732	1	2.30
1112733	2	2.35
1112734	3	2.40



3M™ DBI-SALA® ExoFit™ XE200 Positioning/Rescue Safety Harness

- ▶ Quick connect buckle - chest
- ▶ Auto-locking quick connect buckles - legs and waist
- ▶ Aluminium front centred fall arrest D-ring
- ▶ Aluminium automatic stand-up rear fall arrest D-ring
- ▶ Aluminium work positioning D-rings
- ▶ Shoulders and back comfort padding with 3M™ Scotchlite™ reflective material
- ▶ Leg comfort padding with 3M™ Scotchlite™ reflective material
- ▶ Textile rescue loops

Part code	Size	Weight (kg)
1112735	1	2.90
1112736	2	2.95
1112737	3	3.00





3M™ DBI-SALA® ExoFit™ XE200 Comfort Positioning Safety Harness

- ▶ Quick-connect buckles - chest
- ▶ Auto-locking quick connect buckles - legs and waist
- ▶ Aluminium front centred fall arrest D-ring
- ▶ Aluminium automatic stand-up rear fall arrest D-ring
- ▶ Aluminium work positioning D-rings
- ▶ Aluminium front belt D-ring
- ▶ Shoulders and back comfort padding with 3M™ Scotchlite™ reflective material
- ▶ Leg comfort padding with 3M™ Scotchlite™ reflective material
- ▶ Heavy-duty wear protection on shoulders

Part code	Size	Weight (kg)
1112738	1	2.90
1112739	2	2.96
1112740	3	3.00

CE UK
EN361
CA
EN358



3M™ DBI-SALA® ExoFit™ XE200 Comfort Wind Energy Safety Harness

- ▶ Quick-connect buckles - chest
- ▶ Auto-locking quick connect buckles - legs
- ▶ Aluminium front centred fall arrest D-ring
- ▶ Aluminium automatic stand-up rear fall arrest D-ring
- ▶ Aluminium hip D-rings
- ▶ Shoulders and back comfort padding with 3M™ Scotchlite™ reflective material
- ▶ Leg comfort padding with 3M™ Scotchlite™ reflective material

Part code	Size	Weight (kg)
1112741	1	2.30
1112742	2	2.35
1112743	3	2.40

CE UK
EN361
CA



3M™ DBI-SALA® ExoFit™ XE200 Comfort Wind Energy Positioning Safety Harness

- ▶ Quick-connect buckles - chest
- ▶ Auto-locking quick connect buckles - legs and waist
- ▶ Aluminium front centred fall arrest D-ring
- ▶ Aluminium automatic stand-up rear fall arrest D-ring
- ▶ Aluminium work positioning D-rings
- ▶ Shoulders and back comfort padding with 3M™ Scotchlite™ reflective material
- ▶ Leg comfort padding with 3M™ Scotchlite™ reflective material

Part code	Size	Weight (kg)
1112744	1	2.90
1112745	2	2.95
1112746	3	3.00

CE UK
EN361
CA
EN358



3M™ DBI-SALA® ExoFit™ XE200 Comfort Wind Energy Positioning Safety Harness

- ▶ Quick connect buckle - chest
- ▶ Auto-locking quick connect buckles - legs and waist
- ▶ Aluminium front centred fall arrest D-ring
- ▶ Aluminium automatic stand-up rear fall arrest D-ring
- ▶ Aluminium work positioning D-rings
- ▶ Aluminium front belt D-ring
- ▶ Shoulders and back comfort padding with 3M™ Scotchlite™ reflective material
- ▶ Leg comfort padding with 3M™ Scotchlite™ reflective material

Part code	Size	Weight (kg)
1112747	1	2.95
1112748	2	3.00
1112749	3	3.05

CE UK
EN361
CA
EN358

3M™ DBI-SALA® Accessories



3M™ DBI-SALA® Comfort Accessory Padding For XE50 Safety Harness

Comfortable, lightweight and compact padding provides the opportunity to add extra comfort to your 3M™ DBI-SALA® ExoFit™ XE50 Safety harness. Convenient features including a hook-and-loop attachment and non-slip design makes the padding easy to use, fit, and remove by the user. Heavy-duty construction is suitable for tough work environments.

Shoulder/Back Padding

Part code	Quantity	Weight (kg)
1150514	1 pack	0.15

Leg Padding

Part code	Quantity	Weight (kg)
1150513	2 pack	0.10



3M™ DBI-SALA® Equipment Carrying and Storage Bag

DBI-SALA® branded 20 L equipment carrying and storage bag to store and transport your fall arrest equipment. Compact and lightweight design combined with a heavy-duty closure system makes it a must-have accessory at your worksite. Supplied as standard with all XE200 harnesses.

Part code	Quantity	Weight (kg)
9515749	1	0.40v

Product features overview



Old code	New code	Size	Certifications and Standards	Comfort belt	D-ring material	Auto stand-up D-ring	Work positioning D-ring	Additional attachment points	Shoulders / back / leg padding	3M™ Scotchlite™ reflective material on padding	Shoulders / back padding wear protection	Chest buckle type	Leg buckle type	Belt buckle type	General Industry	Construction	Energy & Utilities	Telecom	Wind Energy	
3M™ DBI-SALA® ExoFit™ XE50 Safety Harness																				
1112901	→ 1112702	1	CE EN361 UKCA		Steel				Optional			PT	PT		●	●	●			
1112900	→ 1112703	2																		
1112902	→ 1112704	3																		
1112907	→ 1112705	1	CE EN361, EN358, UKCA	✓	Steel		✓		Optional			PT	PT	PT	●	●	●	●	●	
1112906	→ 1112706	2																		
1112908	→ 1112707	3																		
1112904	→ 1112708	1	CE EN361, EN1497, UKCA		Steel			Textile rescue loops	Optional			PT	PT		●	●	●			
1112903	→ 1112709	2																		
1112905	→ 1112710	3																		
1112913	→ 1112711	1	CE EN361, UKCA		Steel				Optional			QC	QC		●	●	●			
1112912	→ 1112712	2																		
1112914	→ 1112713	3																		
1112910	→ 1112714	1	CE EN361, EN358, UKCA	✓	Steel		✓		Optional			QC	QC	QC	●	●	●	●	●	
1112909	→ 1112715	2																		
1112911	→ 1112716	3																		
N/A	→ 1112717	1	CE EN361, EN1497, UKCA		Steel			Textile rescue loops	Optional			QC	QC		●	●	●			
N/A	→ 1112718	2																		
N/A	→ 1112719	3																		
3M™ DBI-SALA® ExoFit™ XE100 Safety Harness																				
1112953	→ 1112720	1	CE EN361, UKCA		Steel				✓	Shoulders & back	✓	QC	QC		●	●	●			
1112952	→ 1112721	2																		
1112954	→ 1112722	3																		
1112965	→ 1112723	1	CE EN361, EN358, UKCA	✓	Steel		✓		✓	Shoulders & back	✓	QC	QC	QC	●	●	●	●	●	
1112964	→ 1112724	2																		
1112966	→ 1112725	3																		
3M™ DBI-SALA® ExoFit™ XE200 Safety Harness																				
1113900	→ 1112726	1	CE EN361, UKCA		Aluminium	✓			✓	Shoulders, back & legs	Heavy duty	QC	AQC		●	●	●			
1113902	→ 1112727	2																		
1113903	→ 1112728	3																		
1113910	→ 1112729	1	CE EN361, EN358, UKCA	✓	Aluminium	✓	✓		✓	Shoulders, back & legs	Heavy duty	QC	AQC	AQC	●	●	●	●	●	
1113912	→ 1112730	2																		
1113913	→ 1112731	3																		
1113970	→ 1112732	1	CE EN361, EN1497, UKCA		Aluminium	✓		Textile rescue loops	✓	Shoulders, back & legs		QC	AQC		●	●	●			
1113972	→ 1112733	2																		
1113973	→ 1112734	3																		
1113975	→ 1112735	1	CE EN361, EN358 & EN1497, UKCA	✓	Aluminium	✓	✓	Textile rescue loops	✓	Shoulders, back & legs		QC	AQC	AQC	●	●	●	●	●	
1113977	→ 1112736	2																		
1113978	→ 1112737	3																		
1113987	→ 1112738	1	CE EN361, EN358, UKCA	✓	Aluminium	✓	✓	Front belt D-ring	✓	Shoulders, back & legs	Heavy duty	QC	AQC	AQC	●	●	●	●	●	
1113988	→ 1112739	2																		
1113990	→ 1112740	3																		
1113210	→ 1112741	1	CE EN361, UKCA		Aluminium	✓		Hip D-rings	✓	Shoulders, back & legs		QC	AQC						●	
1113212	→ 1112742	2																		
1113213	→ 1112743	3																		
1113215	→ 1112744	1	CE EN361, EN358, UKCA	✓	Aluminium	✓	✓		✓	Shoulders, back & legs		QC	AQC	AQC				●	●	
1113217	→ 1112745	2																		
1113218	→ 1112746	3																		
1113925	→ 1112747	1	CE EN361, EN358, UKCA	✓	Aluminium	✓	✓	Front belt D-ring	✓	Shoulders, back & legs		QC	AQC	AQC				●	●	
1113927	→ 1112748	2																		
1113928	→ 1112749	3																		

Legend: ● Good ● Better ● Best PT – Pass through QC – Quick connect AQC - Auto-locking Quick connect

Standards explained

CE
EN361 Full body harness
CE
EN358 Belts and restraint lanyards for work positioning
CE
EN1497 Rescue harness
CE Conformité Européenne
UK CA United Kingdom Conformity Assessed

3M™ DBI-SALA® ExoFit™ Safety Harnesses XE Series Size Chart:

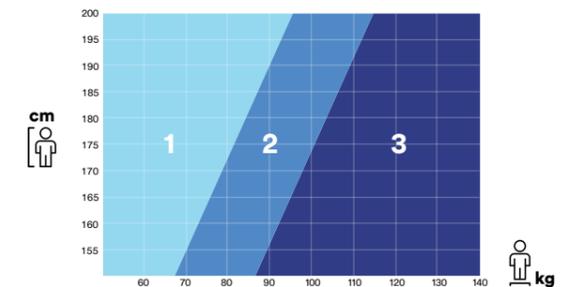

Available Buckle Options for ExoFit™ XE Series Safety Harnesses:



PT Pass through buckles QC Quick-connect buckles AQC Auto-locking quick-connect buckles

3M Belgium BVBA / SPR Hermeslaan 7

Hermeslaan 7
België / Belgique
E-mail: 3M.CDC.bnl@mmm.com
www.3M.be/safety
www.3M.be/securite

3M Ireland Limited

The Iveagh Building
Carrickmines Park
Carrickmines
Dublin 18
E-mail: ohes.helpline.uk@mmm.com
www.3M.co.uk/safety

3M Suisse S.a r.l. / Schweiz GmbH

Eggstrasse 93
8803 Rüschnikon
Suisse / Schweiz
E-mail: arbeitsschutz-ch@mmm.com
www.3Mschweiz.ch/arbeitsschutz
www.3Msuisse.ch/securite

3M Danmark

Hannemanns Allé 53
2300 København S
Danmark
www.3Msikkerhed.dk

3M Italia srl

Via Norberto Bobbio, 21
20096 Pioltello MI
Italia
E-mail: 3Msicurezza@mmm.com
www.3Msicurezza.it

Suomen 3M Oy

Keilaniementie 1
02150 Espoo
Suomi
www.3M.fi/suojaimet

3M Deutschland GmbH

Carl-Schurz-Straße 1
D - 41453 Neuss
Deutschland
E-mail: arbeitsschutz.de@mmm.com
www.3Marbeitsschutz.de

3M Nederland B.V.

Molengraaffsingel 29
2629 JD Delft
Nederland
E-mail: 3M.CDC.bnl@mmm.com
www.3m.nl/safety

3M Svenska AB

Herrjärva torg 4
170 67 Solna
Sverige
www.3M.se/personskydd

3M España, S.A.

Juan Ignacio Luca de Tena, 19-25
28027 Madrid
España
E-mail: ohes.es@3M.com
www.3M.com/es/seguridad

3M Norge A/S

Tærudgata 16
2004 Lillestrøm
Norge
www.3M.no/vern

3M Poland Sp. z o.o.,

Al. Katowicka 117
05-830 Nadarzyn
Polska
www.3m.pl/bhp

3M France

1 Parvis de l'innovation CS 20203
95006 Cergy Pontoise
France
www.3M.com/fr/securite

3M Österreich GmbH

Kranichberggasse 4
1120 Wien
Österreich
arbeitsschutz-at@mmm.com
www.3M.com/at/arbeitsschutz

3M Türkiye

Barbaros Mah. Mor Sümbül Sok.
No:7/3F 27-51
Nidakule Ataşehir Güney 34746
Ataşehir İstanbul
www.3m.com.tr/3M/tr_TR/worker-
health-safety-tr/

3M Greece

3M Ελλάς Μ.Ε.Π.Ε.
Κηφισίας 20
15125, Μαρούσι
Ελλάς
www.3M.com/gr/occsafety

3M Portugal

Rua do Conde Redondo, 98
1169-009 Lisboa
Portugal
www.3M.com/pt/segurança

3M United Kingdom PLC

3M Centre
Cain Road
Bracknell
RG12 8HT
H&S Helpline: 0870 60 800 60
www.3M.co.uk/safety

Important notice

The mounting and use of the product described within this document assumes that the user has previous experience of this type of product and that it will be assembled by a competent professional according to product documentation. Before any use of this product it is recommended to complete some trials to validate the performance of the product within its expected application. All information and specification details contained within this document are inherent to this specific 3M product and would not be applied to other products or environment. Any action or usage of this product made in violation of this document is at the risk of the user. Compliance to the information and specification relative to the product contained within this document does not exempt the user from compliance with additional guidelines (safety rules, procedures). Compliance to operational requirements especially in respect to the environment and usage of tools with this product must be observed. 3M and its affiliates (who cannot verify or control these elements) would not be held responsible for the consequences of any violation of these rules which remain external to its decision and control. Warranty conditions for products are determined with the sales contract documents and with the mandatory and applicable law, excluding any other warranty or compensation.

GLOBAL PRODUCT WARRANTY, LIMITED REMEDY AND LIMITATION OF LIABILITY WARRANTY: THE FOLLOWING IS MADE IN LIEU OF ALL WARRANTIES OR CONDITIONS, EXPRESS OR IMPLIED, INCLUDING THE IMPLIED WARRANTIES OR CONDITIONS OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. Unless otherwise provided by local laws, 3M fall protection products are warranted against factory defects in workmanship and materials for a period of one year from the date of installation or first use by the original owner. **LIMITED REMEDY:** Upon written notice to 3M, 3M will repair or replace any product determined by 3M to have a factory defect in workmanship or materials. 3M reserves the right to require product be returned to its facility for evaluation of warranty claims. This warranty does not cover product damage due to wear, abuse, misuse, damage in transit, failure to maintain the product or other damage beyond 3M's control. 3M will be the sole judge of product condition and warranty options. This warranty applies only to the original purchaser and is the only warranty applicable to 3M's fall protection products. Please contact 3M's customer service department in your region for assistance. **LIMITATION OF LIABILITY:** TO THE EXTENT PERMITTED BY LOCAL LAWS, 3M IS NOT LIABLE FOR ANY INDIRECT, INCIDENTAL, SPECIAL OR CONSEQUENTIAL DAMAGES INCLUDING, BUT NOT LIMITED TO LOSS OF PROFITS, IN ANY WAY RELATED TO THE PRODUCTS REGARDLESS OF THE LEGAL THEORY ASSERTED.

3M | Fall Protection

Registered Offices

Capital Safety (Northern Europe) Limited
3M Centre, Cain Road, Bracknell
Berkshire RG12 8HT, UK

Capital Safety Group (EMEA)
Le Broc Center, Bâtiment A, Z.1. 1re Avenue
– BP15 06511 Carros Le Broc, Cedex, FRANCE

Phone +33 (0)4 83 58 08 08
Email informationfallprotection@mmm.com
Web 3M.com/FallProtection